


# DAIKIN

## altherma

All-in-one, all year round heating,  
cooling and domestic hot water  
supply solution

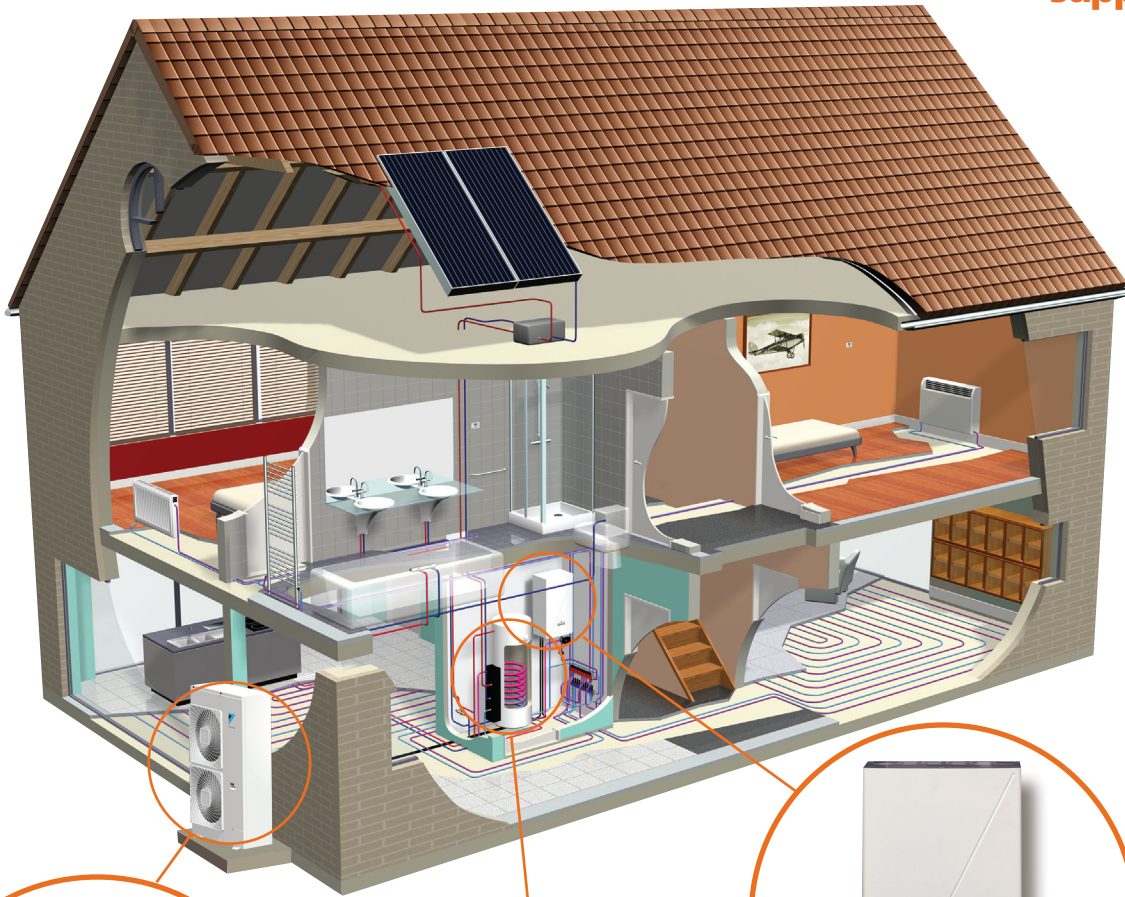

HEAT PUMP  
INVERTER  
R-410A



DAIKIN AC<sup>®</sup>  
absolute comfort

# HIGH TIME FOR ENERGY EFFICIENT AND CLEVER SOLUTIONS!

The climate is changing. The effects are visible throughout the world and even the speed of this change seems to be increasing.

**Your customer sees and hears this every day.**

To limit the consequences of global warming as much as possible, CO<sub>2</sub> emissions must decrease.

**Your customer knows this.**

The supply of fossil fuels is finite and this leads to continuously higher fuel prices.

**Your customer feels this (in his wallet).**

**Your customer wants a heating solution that uses less energy.**

Just like you, your customer realizes it is time to switch to an energy efficient heating system, which produces low CO<sub>2</sub> emissions.

The Daikin Altherma air-to-water heat pump is a durable energy system that transforms unutilized and inexhaustible energy from the outside air into usable heat. Daikin Altherma is best combined with low temperature heating systems and aims to achieve optimal comfort. Moreover, Daikin Altherma is easy to install.



COOLING

HEATING

## 3 IN 1 SYSTEM

## FOR NEW CONSTRUCTION

## & RENOVATION

- MORE COMFORT
- LOW ENERGY CONSUMPTION
- FEWER CO<sub>2</sub> EMISSIONS



DOMESTIC HOT WATER PRODUCTION

1. **DAIKIN altherma** Page 4  
THE 3 IN 1 GUARANTEE  
FOR ABSOLUTE COMFORT
2. **DAIKIN altherma** Page 6  
THE BASICS
3. **DAIKIN altherma** Page 10  
TECHNICALLY
4. **DAIKIN altherma** Page 19  
ECONOMICALLY
5. **DAIKIN altherma** Page 20  
TECHNICAL SPECIFICATIONS
6. **DAIKIN altherma** Page 27  
THE SOFTWARE

# 1. THE 3 IN 1 GUARANTEE FOR ABSOLUTE COMFORT

Daikin Altherma is an innovative system that **heats**, produces **domestic hot water** and can even **cool** spaces. Daikin Altherma offers your customer maximum comfort the whole year through.

These heat pumps are also an interesting alternative for classic gas or fuel oil heating as they offer your customers unique benefits:


- They use renewable energy sources (such as outside air)
- They deliver considerable savings in energy
- They deliver a significant contribution in the fight against CO<sub>2</sub> emissions
- They can provide heating, cooling and domestic hot water

## ENERGY EFFICIENT OPERATION

The air-to-water heat pump from Daikin uses a sustainable energy source. In fact, it extracts heat from the outside air. The system consists of a closed circuit containing R-410A refrigerant. A thermodynamic cycle is created through evaporation, condensation, compression and expansion. A heat pump “pumps” heat from a low to a high temperature level. The heat raised is transferred to the water distribution system (under floor heating, low temperature radiators and/or fan coil units) in the home via a heat exchanger.

Depending on the model and the conditions, a Daikin Altherma air-to-water heat pump delivers between 3 and 5 kWh of usable heat for every 1 kWh of electricity it uses. That’s a great ratio from 3:1 - 5:1!

Renovating your heating system and wanting to reduce your energy costs? Interested in a heating solution with lower energy costs? The heat pump is currently the most efficient indoor comfort system on the market: a cutting-edge technology with clear benefits for you and the environment.

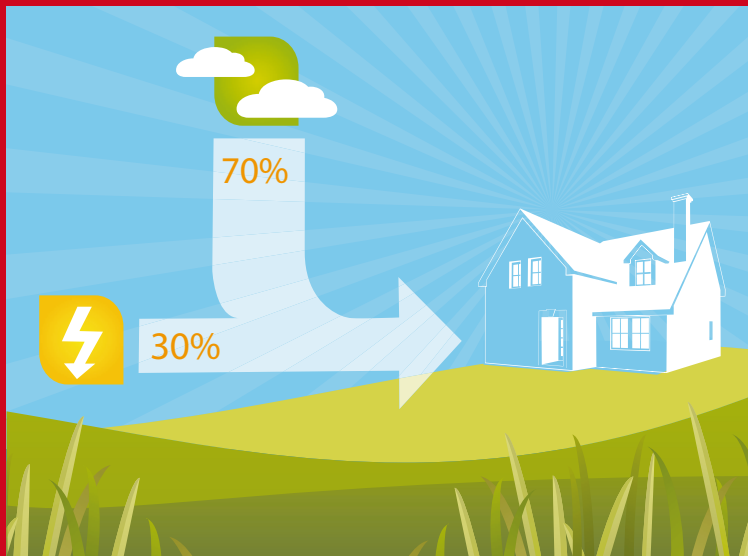

## DAIKIN HEAT PUMP EXPERIENCE

Daikin has more than 50 years of experience with heat pumps, and supplies more than one million of them to homes, shops and offices each year. This success is not just a quirk of fate: Daikin has always been at the cutting edge of technology and its goal is to provide you with turn-key comfort. Only a market leader can guarantee you this level of service and quality control!

## HIGH EFFICIENCY MEANS LOW ENERGY COSTS

Heating system efficiency is measured using the Coefficient of Performance (COP), which is the ratio of heat produced to energy consumed.

### A GOOD DESIGN IN JUST 3 STEPS

STEP 1

Calculation of heat losses  
(Transmission and ventilation losses)

STEP 2

Selection of Daikin Altherma based on heat loss calculation and preferably for a low water temperature application (104°F - 95°F)  
Tip: Use the available Daikin selection and software tools (see page 27)



STEP 3

Selection of heating terminal unit solution, after choosing Daikin Altherma unit, with a  $\Delta T = 5$   
Tip: Remember to consider the pump characteristic of the provided circulator!

### DAIKIN ALTHERMA SYSTEM CONFIGURATIONS



#### MONO-VALENT

- Uses heat pump energy only
- Ideal for new construction
- 100% heat pump coverage: selection of bigger capacity and higher investment cost heat pump

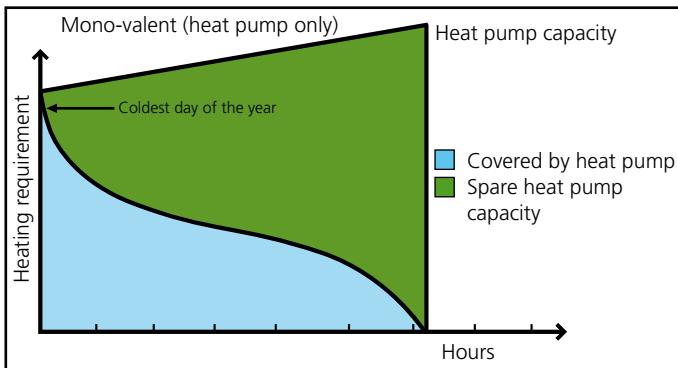



#### MONO-ENERGETIC

- Uses heat pump energy with backup electric heater
- Ideal for new construction
- Best balance between investment cost and running cost, results in lowest lifecycle cost

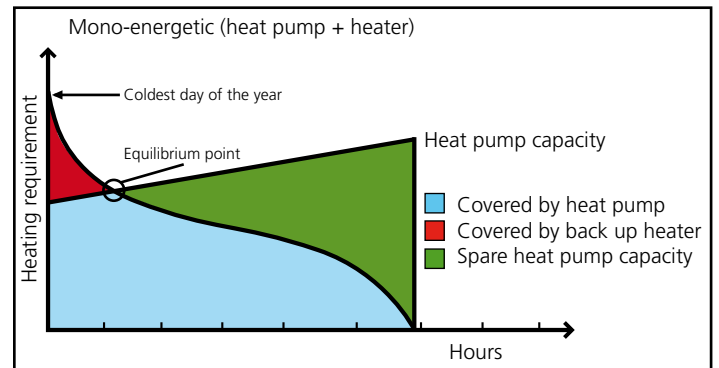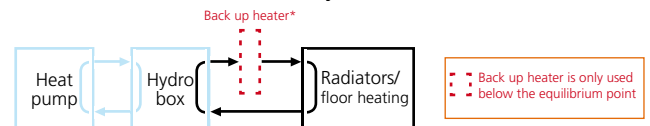

#### BI-VALENT


- Uses heat pump energy with auxiliary boiler
- Ideal for refurbishment/upgrade

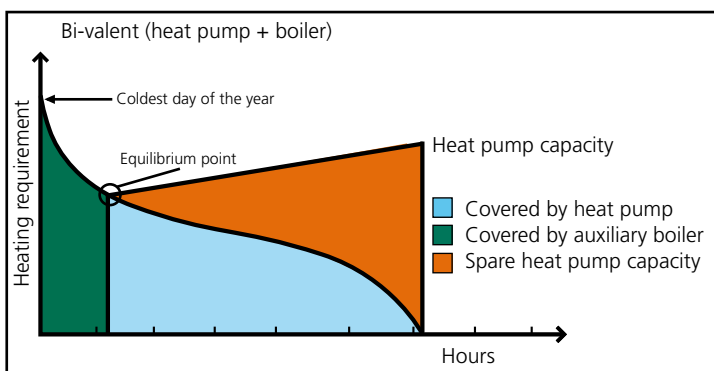

#### SPACE HEATING WITH AN AUXILIARY BOILER

1. Space heating application by either the Daikin Altherma Hydrobox or by an auxiliary boiler connected in the system.
2. An auxiliary contact decides whether the Hydrobox or the boiler will operate.
3. The auxiliary contact can be an outdoor temperature thermostat, an electricity tariff contact, a manually operated contact, etc...
4. Domestic hot water in such an application is always produced by the system tank connected to the Hydrobox, including when the boiler is in operation for space heating.

Daikin offers you the choice between a Daikin Altherma system with an outdoor unit and indoor unit, or a Daikin Altherma Monobloc System, in which the hydrobox components are located within the outdoor unit.

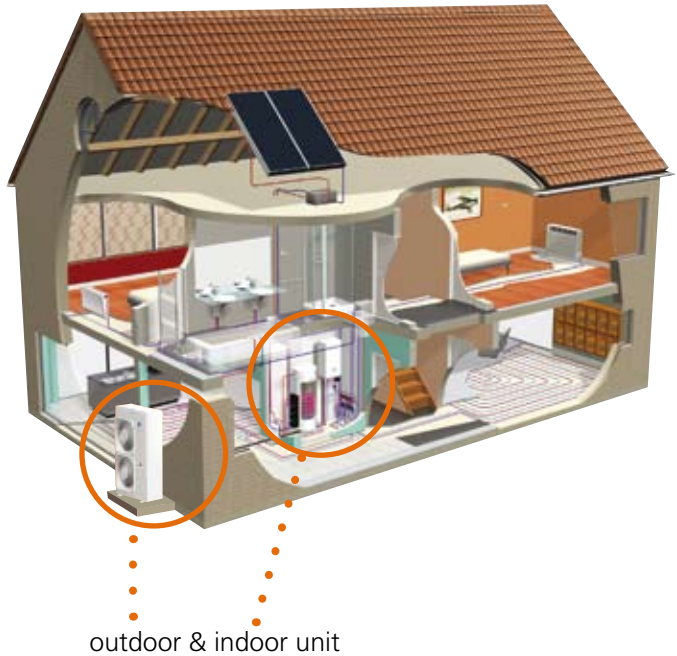
	<b>DAIKIN ALTHERMA</b> <b>SPLIT TYPE</b>
Application	Heating and (optional) cooling (+ domestic hot water)   outdoor & indoor unit
Heat pump type	Outdoor (compressor) unit + Indoor (hydraulic parts) unit
R-410A refrigerant piping	Between outdoor unit and indoor unit
H <sub>2</sub> O piping	Between indoor unit and indoor heating appliances
Installer's advantages	No extra insulation of H <sub>2</sub> O piping required to protect from freezing up

The Split system can be combined with

- Under floor heating
- Fan coil units
- Low temperature radiators to provide your customers the comfort they require.

In addition, the Split system can be connected to

- A domestic hot water tank to supply your customer's hot water needs
- Solar collectors, with optional solar kit, to compliment the production of hot water
- A room thermostat, to regulate the ideal temperature easily, quickly and conveniently.

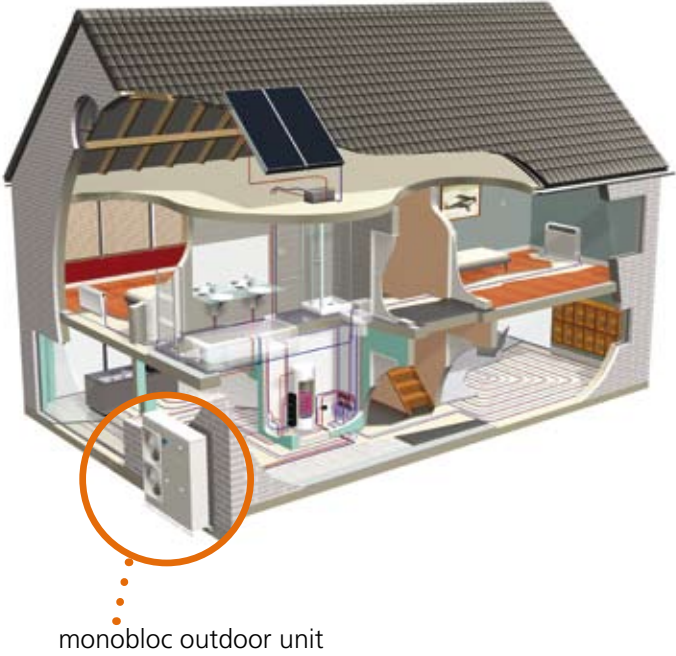	<b>DAIKIN ALTHERMA MONOBLOC</b>
Application	Heating and (optional) cooling (+ domestic hot water)   <p>monobloc outdoor unit</p>
Heat pump type	Outdoor unit only (compressor and hydronic parts combined)
R-410A refrigerant piping	Inside outdoor unit
H <sub>2</sub> O piping	Between outdoor unit and heating terminal units
Installer's advantages	Only H <sub>2</sub> O piping needed to install the system

The monobloc system can be combined with

- Under floor heating
- Fan coil units
- Low temperature radiators to provide your customer the comfort they require.

In addition, the monobloc system can be connected to

- A domestic hot water tank to supply your customer's hot water needs
- Solar collectors, with optional solar kit, to compliment the production of hot water
- A room thermostat, to regulate the ideal temperature easily, quickly and conveniently.

## AIR-TO-WATER HEAT PUMP

The system consists of 5 components which together to provide the ideal comfort and water temperature.

### 1A/ OUTDOOR UNIT : AN EFFICIENT USE OF ENERGY FROM THE AIR

Daikin Altherma uses a natural source of energy. The outdoor unit extracts heat from the outside air and transfers it inside through refrigerant piping to supply heating. The compact outdoor unit is easily installed and, as no drilling or excavation work is required, it can also be installed in condos and apartments.


### 1B/ HYDROBOX : THE HEART OF THE DAIKIN ALTHERMA SYSTEM

The hydrobox heats the water that circulates through low temperature radiators, floor heating systems or fan coil units and also provides domestic hot water. If you opt for the combination of heating and cooling, then the hydrobox can also reverse the cycle to provide lower water temperatures and thus cooling to the home.

### 2/ DOMESTIC HOT WATER TANK : FOR LOW ENERGY CONSUMPTION

As for your domestic hot water, Daikin Altherma is just as clever. The unique lay-out and special placement of the system components maximize energy efficiency. The water inside the storage tank is primarily warmed up by thermal energy from the outside air, thanks to a heat exchanger connected to the heat pump. However, an additional electrical heating element in the domestic water tank can take care of extra heat

required in the shower, tub or sink. At necessary intervals the water is automatically heated to 158°F or more to prevent the risk of bacteria growth. With Daikin Altherma, delightfully warm and perfectly safe water can be enjoyed at all times. Depending on the daily consumption of hot water, Daikin Altherma domestic hot water tanks are available in two different sizes.

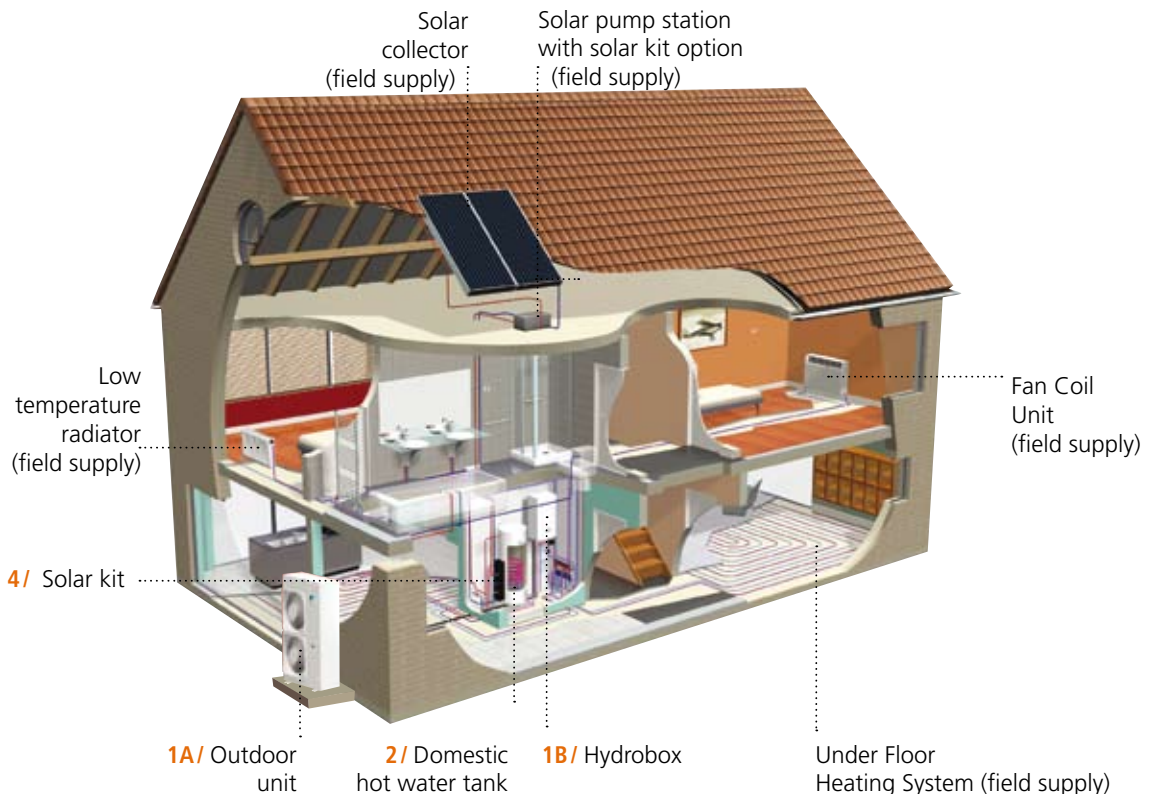



### 3/ MONOBLOC OUTDOOR UNIT: ALL IN ONE

In addition to Daikin Altherma Split type systems, Daikin has a monobloc version in which the hydrobox components are located within the outdoor unit. In this new system, the water pipes, rather than refrigerant


lines, run indoors from the outdoor unit, making installation much quicker and easier for the installer.

### 4/ SOLAR KIT

The solar kit provides the transfer of solar heat to the Daikin Altherma hot water tank via an external heat exchanger. In contrast to tanks with two heat exchangers, this system allows the entire content of the tank to be efficiently heated with solar heat and, if necessary, with heat pump energy.

### 5/ ROOM THERMOSTAT

With the wired room thermostat, the ideal temperature can be easily, quickly and conveniently regulated.

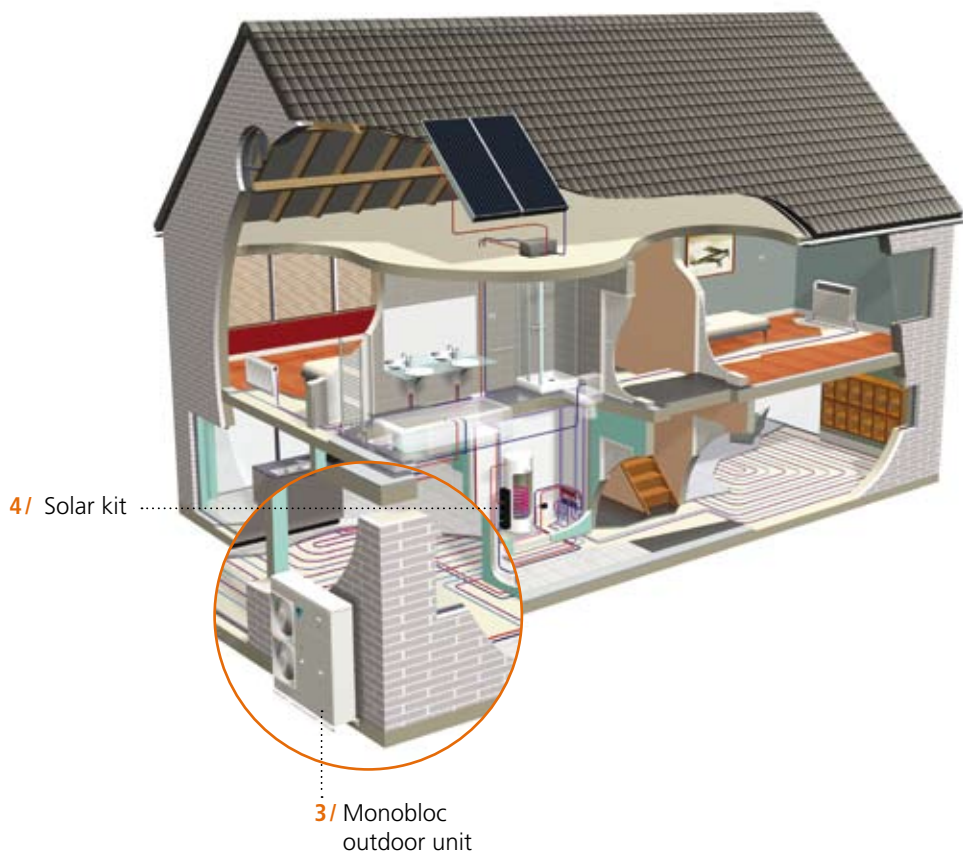

## 1 - DAIKIN ALTHERMA SPLIT TYPE AIR-TO-WATER HEAT PUMP


### THE OUTDOOR UNIT

- Compact, weather-resistant and easy to install
- Contains an inverter controlled compressor for energy efficiency and precise temperature regulation
- Heat pump operation range: heating and domestic hot water to -4°F outside temperature



### HEAT EXCHANGER ANTI-CORROSION TREATMENT


As standard, the heat exchanger in the outdoor unit is provided with an anti-corrosion treatment. This treatment guarantees and noticeably increases the resistance against acid rain and salt corrosion.

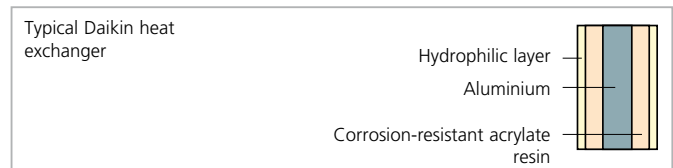

### SUPER PERFORMANCE THANKS TO THE INVERTER PRINCIPLE

The coefficient of performance (COP) of the Daikin Altherma heat pump is also largely attributable to the Daikin inverter principle. An integrated frequency-converter adjusts the rotational speed of the compressor to suit the heating demand. Therefore, the system seldom operates at full capacity and your customer only pays for the energy which they actually need.

#### Heating operation:

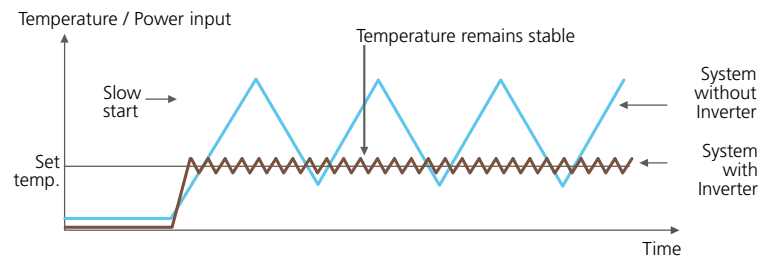

### HIGH EFFICIENCY COMPRESSORS:




The **scroll-compressors** provided are designed as a compact, robust, low-noise device to guarantee optimal operational reliability (no valves and built-in swing-link coupling) and efficiency (through a low initial flow and a constant compression ratio).

## HYDROBOX

- Available in two versions: EKHBH for heating only, EKHBX for heating and cooling
- Built-in electric back-up heater for additional heating during extremely cold outdoor temperatures or as back-up in case of problems with the outdoor unit
- 2 shut-off valves to assemble the water outlet and inlet
- Compact and easy to install: all components are pre-assembled, all parts are easy to reach for maintenance. Wall-mounting is comparable to a traditional gas heater.

1. Heat exchanger
2. Expansion tank (2.64 gal.)
3. Circulator
4. Tank with back-up heating
5. Air purge valve
6. Refrigerant fluid connection
7. Refrigerant gas connection
8. Water inlet connection
9. Water outlet connection
10. Pressure gauge (water circuit)
11. Water filter
12. Pressure relief valve
13. User interface
14. Switch box
15. Flow switch

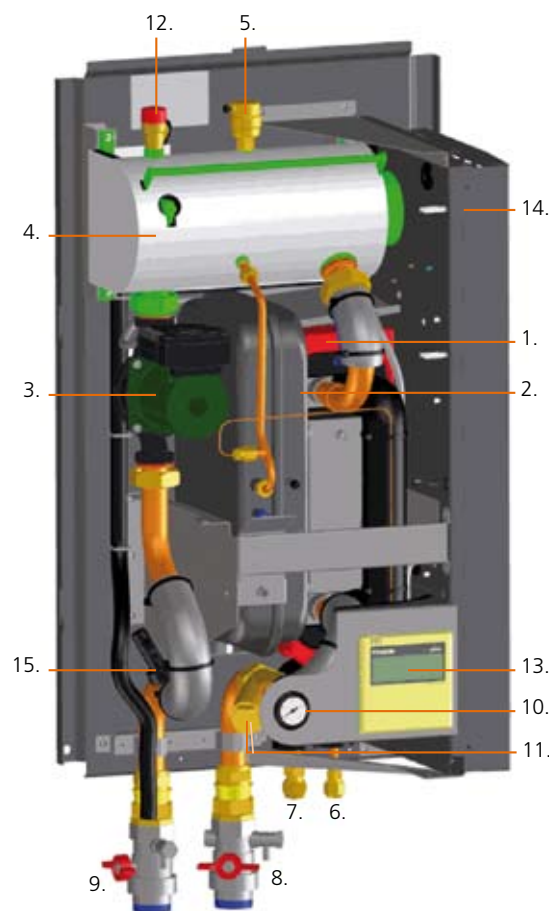

## EXTRA POSSIBILITIES THANKS TO THE INDOOR UNIT...

### Heating and Cooling

If you choose Daikin Altherma with an indoor unit EKHBX, it can not only heat the house, but also cool it. The heat pump is then equipped with a reversible 4-way valve, whereby the refrigeration cycle is reversed and heat is removed from the rooms. The indoor unit can cool rooms via under floor cooling or fan coil units.

### Set temperature limits

To prevent incorrect manual adjustments, temperature limits can be implemented for both cooling and heating. With under floor heating, for example, it is important that the temperature of the water is controlled to the type of floor element. To prevent condensation problems, the temperature for floor cooling can never be lower than 64.4°F. For fan coil units, the water temperature can be allowed to decrease to 41°F.

## THE USER INTERFACE

With the easy to reach digital user interface in the indoor unit, controlling the Daikin Altherma system is also simple for your customer. The display offers a great deal of useful information:

- Day of the week
- Time
- Operating mode  
(heating or cooling, heating domestic hot water, low-noise operating outdoor unit)
- Room thermostat
- Inspection
- Compressor operation
- Pump operation
- Back-up operation
- Booster heating operation  
(in the hot water tank)
- Error codes for alarm
- Temperature  
(outdoor temperature, temperature in hot water tank, leaving water temperature at indoor unit exit)



## DID YOU KNOW...


Your customer can select a maximum of five time periods each day during which the following functions will or will not be activated:

- Low-noise operation of the outdoor unit
- Electric booster heater in the hot water tank
- Heating of the domestic water
- Reduction of the water temperature

The five time periods per function are repeated daily. Your customer can still manually adjust the system when he stays home unexpectedly or stays up later. These settings are automatically switched off at the next programmed event.

## 2 - DAIKIN ALTHERMA MONOBLOC AIR-TO-WATER HEAT PUMP

- All hydronic parts are located within the outdoor unit
- H<sub>2</sub>O piping between outdoor unit and indoor heating apparatus

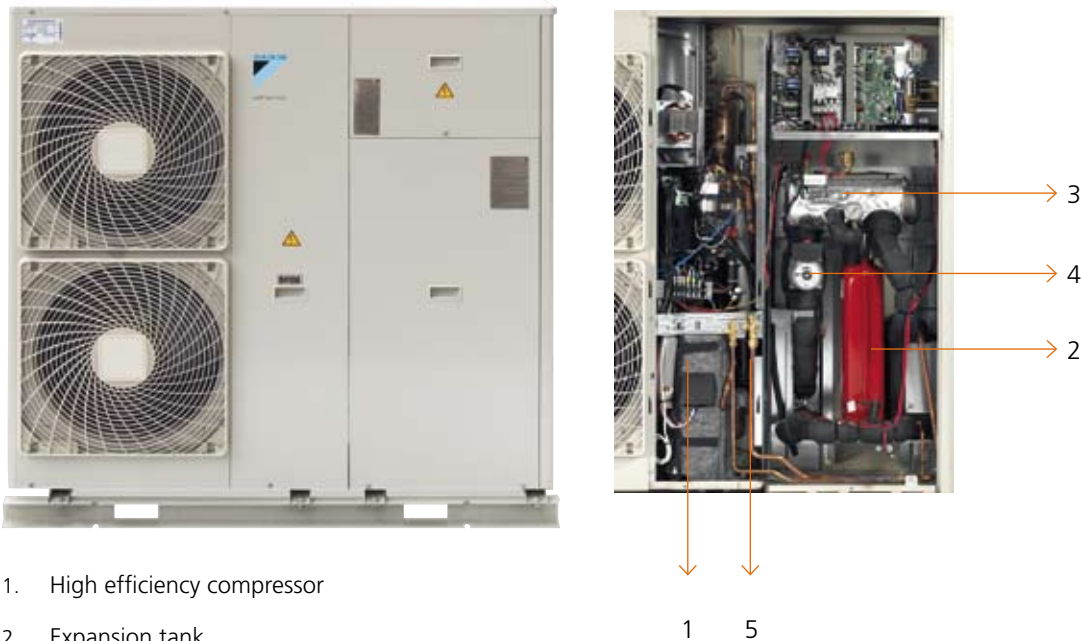

1. High efficiency compressor
2. Expansion tank
3. Tank with back up heating
4. Pressure gauge (water circuit)
5. Refrigerant connection

### ■ Freeze protection of hydronic parts

In order to protect the water pipes from freezing up during winter, insulation is provided for all hydronic components and special software has been applied to activate the pump and back-up heater if necessary. This prevents the water temperature from dropping below freezing point and can minimize the need for the addition of glycol to the water pipes.

### ■ The Daikin Altherma monobloc is available in different versions

- heating only or heating and cooling
- with bottom plate heater
- single phase
- 35MBH, 48MBH, or 54MBH

- **Built-in electric back-up heater** for additional heating during extremely cold outdoor temperatures. The Daikin Altherma Monobloc is standard equipped with a 6 kW back-up heater, which can be adjusted to 3 kW.

If necessary, an "in line" back-up heater of 6 kW can be mounted indoors (also adjustable to 3 kW or 3.5 kW)

- The **scroll-compressors** provided are designed as a compact, robust, low-noise device to guarantee optimal operational reliability (no valves and built-in swing-link coupling) and efficiency (through a low initial flow and a constant compression ratio).




### 3 - THE DOMESTIC HOT WATER TANK

- Available in 2 capacities: 50 and 80 gallons for floor mounted installation.
- Stainless steel design.
- 1 37/64" cfc-free insulation material (polyurethane).
- Contains 2 heating elements: a heat exchanger at the bottom where the hot water from the hydrobox circulates and an extra 3 kW electric heater at the top.
- A thermistor in the hot water tank controls a 3-way valve and/or booster heater via the hydrobox.



1. Field supply
2. Hot water connection
3. Pressure relief valve connection
4. Pressure relief valve (field supply)
5. Electrical box
6. Electrical box lid
7. Recirculation hole
8. Thermistor socket
9. Flow inlet connection
10. Heat exchanger coil
11. Return outlet connection
12. Cold water inlet
13. Threaded thermistor hole for use with solar kit option.  
(Refer to the Installation manual EKSOLHWBAVJU).

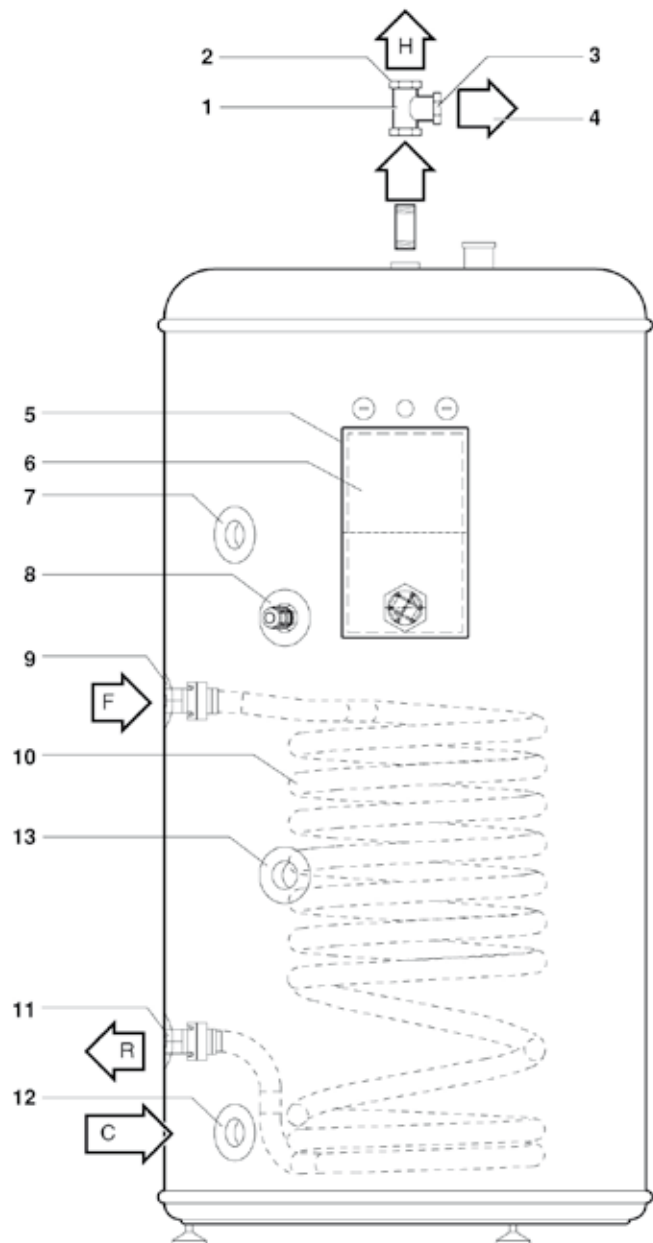

## MULTIFUNCTIONAL HOT WATER TANK ...

### ■ Stainless steel

Daikin offers a tank made of stainless steel equipped with a sacrificial rod to protect the tank against corrosion.

### ■ Anti-bacteria function

To prevent the development of bacteria, the hot water tank is equipped with an anti-bacteria function. You can set up the program so the water is heated to a specific temperature (standard setting = 158°F) at a set time on one or more days of the week.

### ■ Flexible control

It is possible to set “priority setting” for the production of domestic hot water. In this way the customer has domestic hot water available at any time of the day.

The heating of the domestic hot water can also be set up according to the night tariff. Another opportunity for rational energy consumption.

### ■ Regulating switch-on and shut-off temperatures

You personally set the minimum and maximum temperature when the water in the tank must be heated by the heat pump for the customer.

### ■ Delaying booster heater switch-off

To prevent the booster heater from switching on and off too often, you can allow the system to switch off as soon as the temperature reaches a maximum of 39°F higher than the set temperature.

### ■ Allowing back-up heater and booster heater to work separately

Programming the system to prevent the simultaneous operation of the back-up heater and the booster heater is also possible. An interesting possibility for homes with a limited current amp load!

- No natural gas or fuel oil connection or exhaust fume channel required.



## DID YOU KNOW...

Your customers with a solar boiler can enjoy wonderful hot water at any time, even when the sun is not shining? An integrated re-heater is included in the system to help the sun on cloudy days.

## 4 - SOLAR KIT

### SOLAR THERMAL BOILER

Averaged over an entire year, the sun delivers half of the energy we need to bring our domestic water up to the desired temperature for free. Your customer can use this solar energy by connecting a solar boiler to the Daikin Altherma system. A solar boiler is a thermal solar-energy system, whereby solar rays are transformed into heat. The heat is then stored in a water supply tank.


### SOLAR KIT

The solar kit provides the transfer of solar heat to the Daikin Altherma hot water tank via an external heat exchanger. In contrast to tanks with two heat exchangers, this system allows the entire content of the tank to be efficiently heated with solar heat and, if necessary, with heat pump energy.



### Daikin Altherma solar boiler assembly

- Solar collector (to be supplied by the installer)
- Plumbing network and solar pump station (to be supplied by the installer)
- Supply tank: standard Daikin Altherma domestic hot water tank
- Solar kit
- Re-heater (Daikin Altherma heat pump unit, which also provides the home with heating)

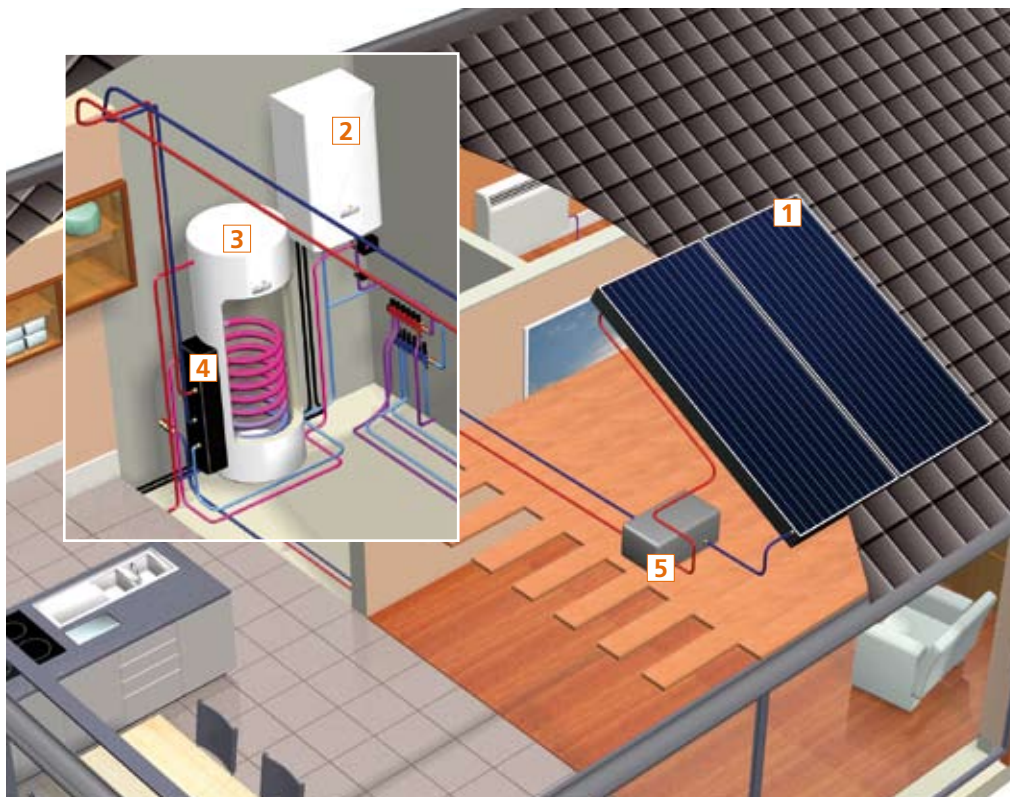

1. Solar collector  
(Flat plate collector)  
(Field Supply)

2. Hydrobox

3. Domestic Hot Water Tank

4. Solar kit

5. Solar pump station  
(Field Supply)



## 5 - THE ROOM THERMOSTAT

The large LCD screen on the room thermostat indicates all the necessary information regarding the setting of the Daikin Altherma system in a blink of an eye. The user can also easily navigate between the different menus whose most common functions and modes include:

- Setting the temperature of the room based on measurements from the built-in sensor
- Cooling and heating mode
- Off function (with integrated frost-protection function)
- Vacation function mode
- Comfort and reduced function modes
- Time (day and month)
- Programmable weekly timer with 2 standard and 5 pre-set programs
- Keylock function
- Setting limits. The installer can change the upper and lower limits



Functions	Wired room thermostat EKRTWA
Heating only	✓
Heating and cooling	✓
Comfort function mode	✓
Reduced function mode	✓
Scheduled function mode	✓
Number of setpoint changes	12/day
Holiday function mode	✓
Off function	✓
Setpoint limitation	✓
Keylock function	✓

### ➤ DID YOU KNOW THAT...

Daikin has set up a number of monitoring sites (in Europe, Oregon, New Hampshire, Alaska, ...), where Daikin Altherma has been tested under totally different climate conditions. High satisfaction has been achieved with increased comfort, stable indoor temperature, low energy consumption and hot water always available... whatever the weather conditions at the monitoring site.



## DID YOU KNOW...

with a Daikin Altherma heat pump, the temperature of the domestic water can go up to 185°F, the temperature of the hot water for heating ranges between 59°F and 131°F and the temperature of the cold water for cooling between 41°F and 72°F.

### **Control customized to your customer**

The water temperature changes in function with the outside temperature so that your customer can enjoy a stable level of heating at any time. As the installer, you set up the system according to the desires of your customer. You input four temperatures to determine the “heating curve” and in doing so, you perfectly tune the Daikin Altherma system to the type of home.

### **Automatic re-start after power interruption**

In the event of a power interruption of up to two hours, the system automatically resumes with the previously set parameters.

### **Quiet operation**

The outdoor unit makes hardly any noise thereby leaving your customer’s (and the neighbor’s) peace and quiet undisturbed. You can even set the outdoor unit to produce 10dB(A) less noise during the night.

### **Electric back-up heating**

Every Daikin Altherma system is equipped with a back-up heater (heating capacity of 3 or 6 kW). This unit can be used for supplemental heating during extremely cold outdoor temperatures or as a back-up in case of any problems with the outdoor unit. Your customer can then enjoy comfortable heating at any moment.

The operation of the back-up heater can be coupled to the outside temperature. The back-up heater will then only operate when outside temperatures are extremely low.


- Customers today are, more than ever, conscious of the cost of heating.
- There is not only the increasing cost of fuel oil and natural gas, but also the limited supply of fossil fuels and the problem of CO<sub>2</sub> emissions.
- Energy efficient heating solutions are gaining in popularity.
- Daikin Altherma debuted in Europe in 2006 and since then has demonstrated significant economical advantages over traditional systems as highlighted on the following graphics.

## 1. 66 To 80% Additional Heat

A heat pump boiler works more efficiently and saves more energy than a traditional heating system using fossil fuel. Daikin Altherma generates at least 3 to 5 kW of additional heat per 1kW of electricity used. Talk about a good investment.

### OPERATING COSTS:

Conditions: Required annual heating energy: 20,000 kWh. Source: Energy prices based on EUROSTAT statistics [first semester 2007].

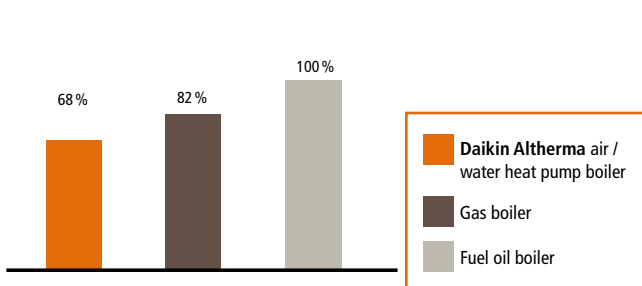


## 2. PER (primary energy ratio)

This is the relationship between the useable energy generated and the primary energy consumed, with consideration for the electricity production efficiency and the electricity distribution.

### LOW PRIMARY ENERGY CONSUMPTION

Conditions : For combustion systems, the PER indicates the overall efficiency of the system, while for heat pumps it is equal to the seasonal performance factor multiplied by the electricity production efficiency which on average is 0.4 in the European Union.

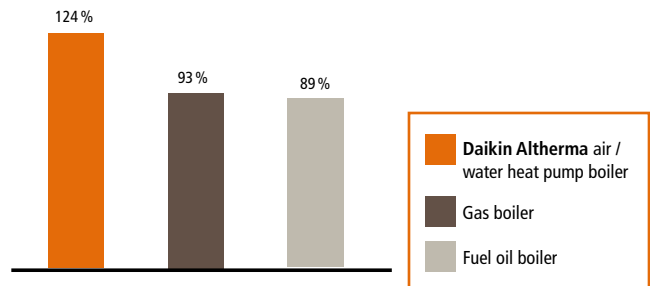


## DID YOU KNOW...

A small amount of ventilation in highly insulated houses provides for a healthy interior environment. The principle is simple: fresh air enters and contaminated air is removed.

In total, there are 4 ways in which air can be introduced and removed. But there is only one that is energy efficient, and that is ventilation with heat recovery. A maximum amount of energy is recuperated from the contaminated air and transferred to the fresh air.

By equipping the home with a ventilation system that includes heat recuperation, the heating requirement decreases and the quality of the home increases.

## AVERAGE ANNUAL CO<sub>2</sub> EMISSIONS

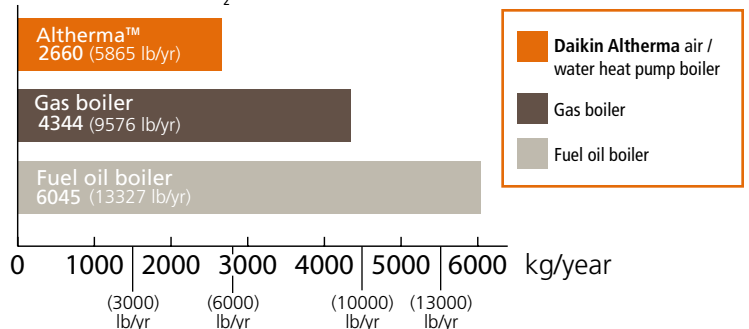

Calculation based on data from Eurelectric (organisation of European electricity producers), "Eurelec Program - 2001" for EU27

## LOWER CO<sub>2</sub> EMISSIONS

Daikin Altherma produces no direct CO<sub>2</sub> emissions, so you personally contribute to a better environment. The system does use electricity, but even without renewable electricity the CO<sub>2</sub> emissions are still much lower than boilers that use fossil fuels.

# HYDROBOX



HYDROBOX			EKHBH054BA3VJU	EKHBX054BA3VJU	EKHBH054B6VJU	EKHBX054B6VJU
Function			Heating only		Reversible	
Leaving water temperature range	Heating	°F	77 - 131*		77 - 131*	
	Cooling	°F	-		41 - 71.6	
Drain valve			yes			
Material			Epoxy polyester painted galvanized steel			
Color			Neutral white (RAL 9010)			
Dimensions (Net)	HxWxD	in.	36 5/16 x 19 3/4 x 14 7/32	36 5/16 x 19 3/4 x 14 7/32	36 5/16 x 19 3/4 x 14 7/32	36 5/16 x 19 3/4 x 14 7/32
Weight (Net)		lbs.	123		123	
Factory mounted heater	Capacity	kW	3	3	6	6
	Capacity Steps		1	1	2	2
	Power supply		208-230V/1Ph/60Hz	208-230V/1Ph/60Hz	208-230V/1Ph/60Hz	208-230V/1Ph/60Hz

When connected to all outdoor units	Main components	Expansion vessel	Volume	gal.	2.64		2.64	
			Max. water pressure	PSI	43.5		43.5	
			Pre Pressure	PSI	14.5		14.5	
		Water circuit	Piping connections diameter		in.	1 1/4 Male BSP		1 1/4 Male BSP
	Piping		in.	1 1/4		1 1/4		
	Safety valve		PSI	43.5		43.5		
	Total water volume		gal.	1.45		1.45		
	Refrigerant circuit	Gas side diameter		in.	ø 5/8		ø 5/8	
		Liquid side diameter		in.	ø 3/8		ø 3/8	
	Operation range	Waterside	Heating	°F	59 - 131		59 - 131	
Cooling			°F	-		41 - 71.6		
When connected to ERLQ36	Main components	Pump	Nominal ESP unit	Heating	PSI	7.6		7.6
			Cooling	PSI	-		8.1	
		Water side Heat exchanger	Water volume		gal.	0.26		0.26
			Water flow rate Min./Max		GPM	4.23/15.32		4.23/15.32
			Water flow rate Nom.	Heating	GPM	8.48		8.48
				Cooling	GPM	-		7.58
When connected to ERLQ48	Main components	Pump	Nominal ESP unit	Heating	PSI	6.3		6.3
			Cooling	PSI	-		7.1	
		Water side Heat exchanger	Water volume		gal.	0.26		0.26
			Water flow rate Min./Max		GPM	4.23/15.32		4.23/15.32
			Water flow rate Nom.	Heating	GPM	10.59		10.59
				Cooling	GPM	-		9.46
When connected to ERLQ54	Main components	Pump	Nominal ESP unit	Heating	PSI	5.08		5.08
			Cooling	PSI	-		6.79	
		Water side Heat exchanger	Water volume		gal.	0.26		0.26
			Water flow rate Min./Max		GPM	4.23/15.32		4.23/15.32
			Water flow rate Nom.	Heating	GPM	12.13		12.13
				Cooling	GPM	-		9.93

\*Back up heater operation between 59°F and 77°F



altherma

# OUTDOOR

**INVERTER**



## OUTDOOR UNIT

			ERLQ036BAVJU	ERLQ048BAVJU	ERLQ054BAVJU	
Nominal capacity	Heating	MBh	38.2	47.8	54.6	
	Cooling	MBh	47.6	59.1	60.6	
Nominal input	Heating	kW	2.58	3.30	3.97	
	Cooling	kW	3.91	5.94	6.94	
COP			4.34	4.24	4.03	
EER			12.17	9.95	8.73	
Fan	Motor	Model	Brushless DC motor			
		Output	W 70			
Operation range	Heating	°F	-4 - 95			
	Cooling	°F	50 - 114.8			
	Domestic water	°F	-4 - 109.4*			
Sound power level	Heating	dBA	64	64	66	
	Cooling	dBA	64	66	69	
Sound pressure level	Heating	dBA	49	51	53	
	Cooling	dBA	50	52	54	
Air Flow Rate (nominal at 230V) (cfm)	Heating	m <sup>3</sup> /min	3178	3178	3178	
	Cooling	m <sup>3</sup> /min	3390	3531	3425	
Piping connections	Liquid (OD)	Type	Flare connection			
		Diameter (OD)	in. ø 3/8	ø 3/8	ø 3/8	
	Gas	Type	Flare connection			
		Diameter (OD)	in. ø 5/8	ø 5/8	ø 5/8	
	Drain	Type	Hole			
		Diameter (OD)	in. ø 1	ø 1	ø 1	
	Piping Length	Minimum	ft.	16.4	16.4	16.4
		Maximum	ft.	246	246	246
		Equivalent	ft.	312	312	312
		Chargeless	ft.	98.4	98.4	98.4
Installation Height Difference	Maximum	ft.	98.4	98.4	98.4	
	Refrigerant charge	R-410A	lbs. 8.15			
Power supply			208-230V/1Ph/60Hz			
Recommended fuses			A 30			
Dimensions (Net) HxWxD			in. 46 1/16 x 35 7/16 x 12 5/8			
Weight (Net)			lbs. 227 227 227			

Measuring conditions: Heating Ta DB/WB 44.6°F/42.8°F - LWC 95°F (DT=41°F) - Cooling Ta 95°F - LWE64.4°F (DT=41°F)

\* Booster heater operation from 95°F onwards

(1) These conditions are based on under floor heating/cooling application

# MONOBLOC



## OUTDOOR UNIT

			HEATING ONLY			REVERSIBLE		
SINGLE PHASE	With bottom plate heater		EDLQ036BA6VJU	EDLQ048BA6VJU	EDLQ054BA6VJU	EBLQ036BA6VJU	EBLQ048BA6VJU	EBLQ054BA6VJU
Nominal capacity	Heating	MBh	38.2	47.8	54.6	38.2	47.8	54.6
	Cooling	MBh	-	-	-	43.8	54.5	57.0
Nominal input	Heating	kW	2.59	3.33	3.93	2.59	3.33	3.93
	Cooling	kW	-	-	-	3.91	5.79	6.43
COP			4.32	4.20	4.07	4.32	4.20	4.07
EER			-	-	-	11.20	9.41	8.86
Operation range	Heating	°F	5 - 95 <sup>(1)</sup>			5 - 95 <sup>(1)</sup>		
	Cooling	°F	-			50 - 114.8		
	Domestic water	°F	5 - 95 <sup>(1)(2)</sup>			5 - 95 <sup>(1)(2)</sup>		
Sound power level	Heating	dBA	64	64	66	64	64	66
	Cooling	dBA	-	-	-	65	66	69
Sound pressure level	Heating	dBA	51	51	52	51	51	52
	Cooling	dBA	-	-	-	50	52	54
Refrigerant charge			R-410A lbs. 6.5			6.5		
Power supply			208-230V/1Ph/60Hz			208-230V/1Ph/60Hz		
Recommended fuses			A 30			30		
Dimensions (Net) HxWxD			in. 55 27/32 x 56 1/2 x 15 1/32			55 27/32 x 56 1/2 x 15 1/32		
Weight (Net)			lbs. 397			397		

Measuring conditions: Heating Ta DB/WB 44.6°F/42.8°F - LWC 95°F - Cooling Ta 95°F - LWE64.4°F

(1) E(D/B)L\* models can reach -4°F but without capacity guarantee

(2) Booster heater operation from 95°F onwards

(3) These conditions are based on under floor heating/cooling application

# DOMESTIC HOT WATER TANK



			EKHWS050BA3VJU	EKHWS080BA3VJU
Water volume	gal.		52.8	79.2
Max. water temperature	°F		185	
Max. water pressure	PSI		145	
Insulation (Polyurethane foam) Min. thickness	in.		1 3/4	
Height	in.		45 1/32	63
Diameter	in.		22 1/16	
Booster heater	kW		3	
Piping connections	Water inlet H/E Diameter	in.	ø 3/4 FBSP	
	Water outlet H/E Diameter	in.	ø 3/4 FBSP	
	Cold water in Diameter	in.	ø 3/4 FBSP	
	Hot water out Diameter	in.	ø 3/4 FBSP	
Nominal running current	A		13	
Fuse	Size	A	20	
Power supply	208-230V/1Ph/60Hz			
Material inside tank	Stainless steel (DIN 1.4521)			
Material outside casing	Epoxy-coated mild steel			
Color	Neutral white			
Dimensions (Net)	HxWxD	in.	45 9/32 x 22 27/32 x 22 27/32	63 x 22 27/32 x 22 27/32
Empty weight	lbs.		99	129.8

# SOLAR KIT



				EKSOLHWBAVJU
Heat exchanger	pressure drop	psi		3.12
	max. inlet temp	°F		230
	heat exchange capacity	W/K		1,400
	Logarithmic mean temperature difference (LMTD)	K		5
Pump	Number of speeds			3
	Power input	W		46
Water circuit	Piping connections diameter	in.		3/4 FBSP
Ambient temperature	max.	°F		95
	min.	°F		33.8
Power supply	208-230V/1Ph/60Hz			
Power supply intake	from indoor unit			
Dimensions (Net)	HxWxD	in.	30 1/32x12x10 1/32	

# ROOM THERMOSTAT



thermostat

				EKRTWA
Ambient temperature	Storage	°F		-4 - 140
	Operation	°F		32 - 122
Temperature setpoint range	Heating	°F		39.2 - 98.6
	Cooling	°F		39.2 - 98.6
Clock				yes
Regulation function	proportional band			
Dimensions (Net)	HxWxD	in.	87x125x34	
Weight (Net)	lbs.		0.47	